

Covering of wooden frame systems

PREBENA


www.prebena.de

Slider 7F-CNW90

for Coilnails type CNW from 45 - 90 mm (1-3/4" - 3-1/2")



Applicable in both directions

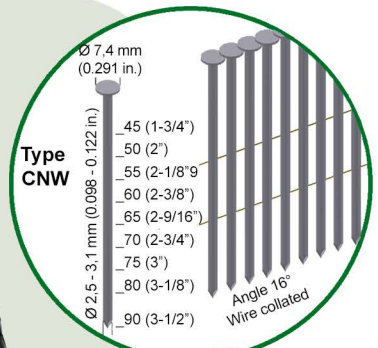

EUROCODE 5
CE EN 14592



Easy distance adjustment



Double-sided operable

No electrical connection necessary
Pneumatic / mechanical regulation
Shooting of the Coilnails in accurate, constant distances

Technical specification:

Weight: 11 kg (24.25 lb.)
Operation pressure: 5 - 8 bar (71 - 114 psi.)
Air requirement: approx. 2,85 l (0.627 gal./ nail)
LxWxH: 455 x 345 x 455 mm
(17.91 x 13.58 x 17.91 in.)

Application areas:

Wooden composite boards (e.g. OSB)

- Single shot everytime
- Double-sided possible
- Applicable in both directions
- Roll-controlled automatic fire
- Distance adjustment for 40, 60, 80, 110 mm (1.57, 2.36, 3.15, 4.33 in.)
- Guide-sight slot
- Adjustable lateral stop
- Safety device - Operation only when device on material
- Double-sided operable
- Adjustable depth control
- Rubberized wheels
- Adjustable exhaust



PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20 - 26 • D-63679 Schotten

Phone: 0049 6044/9601-0 • Fax: 0049 6044/9601-820 • info@prebena.com