

**FAST
EASY
EFFECTIVE**



www.prebena.com



SlideSystem
FOR **TIMBER FRAME SYSTEM**

Covering of wooden frame systems

PREBENA®


www.prebena.de

Slider 5C-Z75

for staples type Z from 35 - 75 mm (1-3/8" - 3")



Applicable in both directions

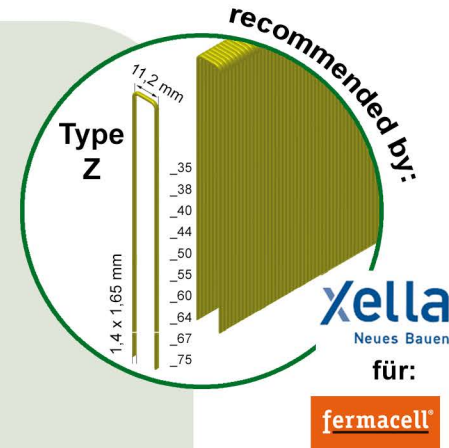

Easy distance adjustment



Double-sided operable

No electrical connection necessary
Pneumatic / mechanical regulation
Shooting of the staples in accurate, constant distances
Angle of staple entry 30° according to Eurocode 5

Technical specification:

Weight: 9,98 kg (21.99 lb.)
Operation pressure: 5 - 8 bar (71 - 114 psi.)
Air requirement: 2,3 l / staple (0.607 gal. / staple)
LxWxH: 455 x 345 x 455 mm
(17.91 x 13.58 x 17.91 in.)

Application areas:

Plasterboards, gypsum fiberboards, wooden composite boards (e.g. OSB)

Also available with pneumatic stapler 5C-Q67.

- Single shot everytime
- Double-sided possible
- Lock-out safety device
- Applicable in both directions
- Roll-controlled automatic fire
- Distance adjustment for 40, 60, 80, 110 mm (1.57, 2.36, 3.15, 4.33 in.)
- Guide-sight slot
- Adjustable lateral stop
- Safety device - Operation only when device on material
- Double-sided operable
- Adjustable depth control
- Rubberized wheels
- Adjustable exhaust
- Quick release



Extension of the handle as accessory available.

PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20 - 26 • D-63679 Schotten

Phone: 0049 6044/9601-0 • Fax: 0049 6044/9601-820 • info@prebena.com